

**2017 IDEERS Rules
for Undergraduate Teams**


IDEERS2017-V1

2017-05-25

1 of 21

The List of Rule Revisions

Version No.	Date	Remarks
V1	2017-05-25	None

	2017 IDEERS Rules for Undergraduate Teams	IDEERS2017-V1
		2017-05-25
		2 of 21

The content presented below serves as the primary rules of this competition. However, if there are cases not stipulated or clearly defined in the rules, the organizer reserves the right of final interpretation of the cases.

1. The overview of this competition

Each team is required to design and construct a building model at the competition venue. The model should be able to resist the earthquakes generated by the shaking table at National Center for Research on Earthquake Engineering (NCREE).

This is a two-day competition. On the first day, each team has 6.5 hours (including a lunch break) for constructing the building model. All the materials and tools are provided by the organizer.


On the second day, all models will be tested on the shaking table at NCREE. The artificial earthquakes with various intensities will be generated by using the shaking table. The peak ground acceleration (PGA) will gradually increase to 800 gal (gal = cm/sec²).

All models are ranked by using the efficiency ratio (ER). The value of ER is computed based on the mass of the model itself, the number of mass blocks supported by the model and the PGA eventually resisted by the model. The winner will be the team whose model obtains the largest value of ER.

In order to increase the challenge and interest of this competition, the theme of this year's competition is to construct a leisure hotel within the assigned building site. The shapes of floor plans are not restricted. Nevertheless, because the lobby and banquet halls of the hotel are to be set in the first and second stories, these two stories (i.e., the 1st and 2nd stories) should be elevated and be larger in floor areas than the other stories. Therefore, a certain extent of setback is required for the 3rd and upper stories. Additionally, there is an outdoor swimming pool at the top of the hotel. All teams are encouraged to exert their knowledge and creativity to construct effective and efficient building models.

2. The composition of team members

Each team consists of four students registered in the same university/college and one instructor, who is a teacher at the same school. During the two-day competition, the instructor is not allowed to use hands on constructing the model.

	2017 IDEERS Rules	IDEERS2017-V1
	for Undergraduate Teams	2017-05-25
		3 of 21

3. Materials and tools

Only the materials and the tools provided by the organizer can be used in this competition. Stationeries, e.g. pencils, rulers, erasers, and calculators, can be prepared by the teams. Nevertheless, these stationeries can be used only for computing and marking the materials. They cannot be used for cutting and drilling. Moreover, the organizer will prepare some L-shape rulers, which can be borrowed from the service desk. These L-shape rulers are to be used only for measuring and positioning.

3.1 Materials


The materials provided by the organizer include:

Item	Quantity	Details
1. Wooden base board	1	It is made of medium density fiberboard (MDF). The size of the board is about 0.55 cm thick, 26 cm (L) × 26 cm (W) (± 0.3 cm).
2. Wooden stick	40	They are made of MDF. They are used for constructing the model. Each stick is 70 ± 0.5 cm long with a $5.5 \text{ mm} \times 4 \text{ mm}$ (± 1 mm) rectangular cross section.
3. Hot-melt glue stick	20	Each stick is about 30 cm long and 6 mm in diameter. These glue sticks cannot be used as the members of the building model.
4. Rubber band	16	Each rubber band is 3 mm wide, 1.5 mm thick, and the perimeter is about 240 mm.
5. A4-size paper	12	12 sheets of A4-size paper
6. String	1	A tinted cotton string with 4 m long
7. Bamboo stick	1	This item is used for making the team flag.

3.2 Tools

The tools provided by the organizer include:

Item	Quantity	Details
1. Fixing plate	1	This plate is used for fixing the models onto the shaking table as well as for checking the building area.
2. Scissors	1	It is a general office scissors.
3. Wire saw	1	0.9 cm wide and 30 cm long
4. Tape measure	1	The total length is 5.5 m.
5. Manual drill	1	Its bit is 8 mm.
6. Hot-melt glue gun	1	It is a general hot-melt glue gun
7. Large utility knife	2	The width of the blade is about 1.8 cm.
8. Pencil	1	It is a general office pencil.
9. Pencil sharpener	1	It is for sharpening the pencils.
10. Protractor	1	It is a general office plastic semicircular protractor.
11. Marker pen	1	It is a general office marker pen.

	2017 IDEERS Rules for Undergraduate Teams	IDEERS2017-V1
		2017-05-25
		4 of 21

12.Ruler	1	30cm long plastic straight ruler
13. Cotton gloves	2	The participators can wear the cotton gloves to avoid burns when using the hot-melt glue gun.
14.Hammer	1	Small hammer
15.File	1	Small file
16.Glue stick	1	Glue stick
17.Cutting mat	1	A3 size

Before constructing the model, each team should make sure that they have received all the materials and tools list above. If any material/tool is missed or damaged, please report to the judges for assistance.




Schematic picture of the tools

4. The features of the model

All teams are encouraged to exert their creativity on constructing the model. Nevertheless, the following rules related to the models need to be complied with.:

Item	Details
4.1 Basic structure	<p>4.1.1 All models must follow the common rules of building construction. That is to say, the models are composed of the basic structural components of building structures, e.g., beams, columns, slabs, walls, and bracings.</p> <p>4.1.2 The structural components should be composed of the materials provided by the organizer. For example, the structural components can be composed of a single wooden stick, multiple wooden sticks, strings,</p>



2017 IDEERS Rules for Undergraduate Teams

IDEERS2017-V1

2017-05-25

5 of 21

rubber bands and papers.

4.1.3 It is not necessary to add claddings/decorations to the models for the purpose of aesthetic appearance. Even if claddings/decorations are added into the model, the clearance requirements stated in section 4.7 should be still met. It should be feasible for the judges to inspect and compute the building area of the model.


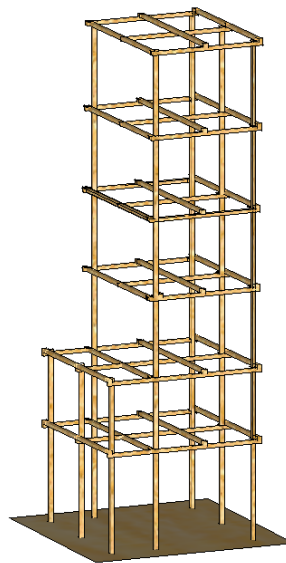


Figure 1. Schematic drawing of the building model.

4.2 Site
area of the
model

4.2.1 Models must be constructed on the base board (26 cm × 26 cm × 0.55 cm) provided by the organizer. A 3 cm clearance around the edges of the base board must be kept in order to fix the model onto the shaking table. Teams violating this rule will be disqualified or punished by adding penalty weights to the models.

4.2.2 The allowable site area is the 20 cm × 20 cm square shown as the dotted lines in Figure 2. The projection of the entire model onto the base board must be within this 20 cm × 20 cm square.



2017 IDEERS Rules for Undergraduate Teams

IDEERS2017-V1

2017-05-25

6 of 21

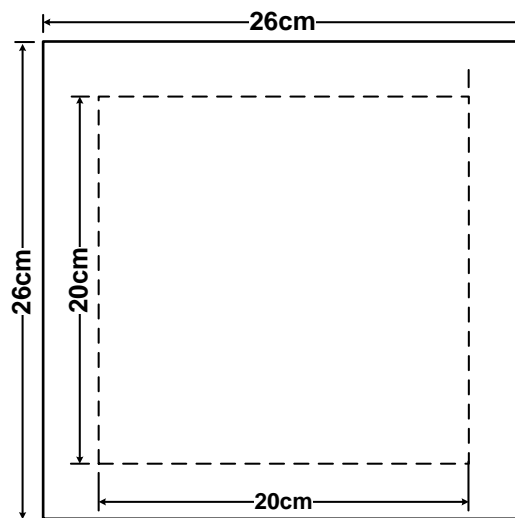



Figure 2. The allowable site area of the model.

4.3
Number of
wooden
sticks fixed
on the base
board

- 4.3.1 It is allowed to drill holes on the base board for fixing *columns*. There is no restriction on the number of columns fixed on the base board.
- 4.3.2 It is acceptable to carry out enhanced measures (e.g., enlarged holes, cotton strings running in a ditch, etc.) to fix columns on the base board. Nevertheless, the enlarged holes, ditches, etc. arising from the enhanced measures should be backfilled with hot-melt glue to avoid intended reduction of the base board weight.
- 4.3.3 The base board should be kept flat and integral such that it can be mounted onto the shake table without troubles.
- 4.3.4 All of the columns must be fixed on the base board. Isolated system is not allowed.

4.4 Floors

- 4.4.1 Figure 3 shows the definition of floor number and the minimum area of each floor. There are at least four complete floors in the model (Figure 3). That is to say, except the 1FL, there are at least four floors can be loaded with mass blocks.
- 4.4.2 The height of the model, measured from the top of the base board to the top of the RFL, must be not less than 45 cm and not larger than 70 cm. In addition, the total height including the flag and decorations should be not larger than 80 cm.
- 4.4.3 All floors, including the RFL but excluding the 1FL, will be loaded with mass blocks. The weight factor for the mass blocks on every floor, which will be used to compute the ER, is shown in Figure 3.



2017 IDEERS Rules for Undergraduate Teams

IDEERS2017-V1

2017-05-25

7 of 21

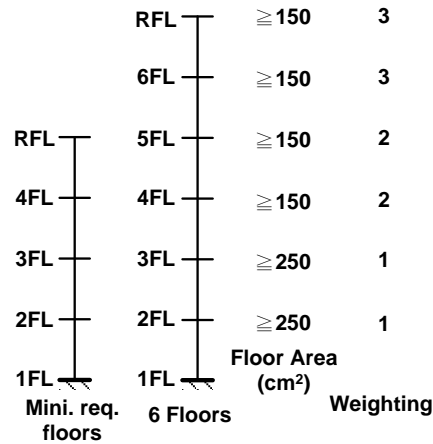


Figure 3. Floor layout.

4.5 Floor area

4.5.1 The floor area is defined as the area enclosed by the edge beams. The floor area is measured along the outer edges of the edge beams shown as the black dashed lines in Figure 4. The two ends of the edge beams should be connected to the columns, which are fixed on the base board and are continuous from the ground to the floor. The minimum floor area for each of the 2FL and 3FL is 250 cm². The minimum floor area for each of the other floors is 150 cm². The total floor area, excluding the 1FL, of the model must be between 1000 cm² and 2000 cm². There is no mass block placed on the 1FL. The 1FL area is also not counted in.

4.5.2 Setback is required for the 4FL and the upper floors. Each floor area of the 4FL and the upper floors should be 60% to 80% of that of the 3FL.

4.5.3 Courtyards are not regarded as the setback mentioned above.





Figure 4. The floor area is the area enclosed by the black dashed lines.

4.6 Clear floor

4.6.1 The clear floor height of the 1st floor is not less than 15 cm.



2017 IDEERS Rules for Undergraduate Teams

IDEERS2017-V1

2017-05-25

8 of 21

height

4.6.2 Except the 1st floor, the clear floor height of each floor is not less than 10 cm and not larger than 12 cm.

4.6.3 The clear floor height of the i -th floor is defined as the distance between the bottom edge of the lowest beam of the $(i+1)$ -th floor and the top edge of the highest beam of the i -th floor (Figure 5).

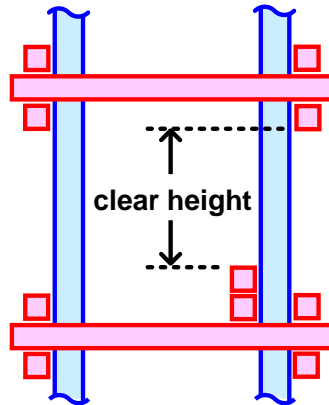


Figure 5. The definition of a clear floor height.

4.7
Exterior
clearance

4.7.1 There are openings for installing doors and windows on every floor of a real building. Therefore, every floor of the model must keep some exterior clearance X_i , in which there is no material/member installed along the perimeter L_i of the floor (Figure 6). The ratio of ΣX_i to ΣL_i for each floor should be no less than a certain value (to be specified later). It should be noted that the downward projected lengths of bracings and walls should be considered.

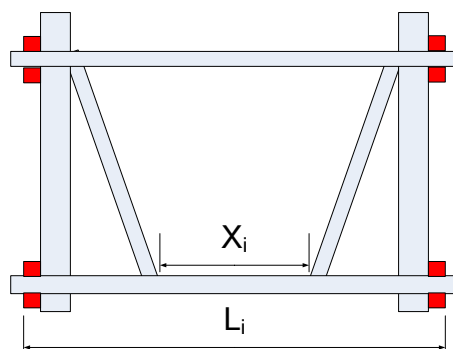


Figure 6


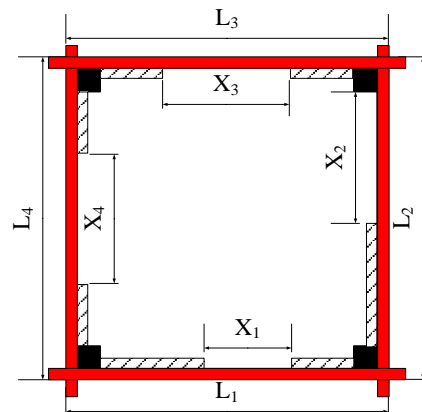


Figure 7

4.7.2 ΣL_i (Figures 6 and 7) is the sum of the floor perimeter defining the floor area shown as Figure 4. ΣX_i is the sum of the parts of the floor perimeter, which are not occupied by the projection of walls, bracings and columns.



2017 IDEERS Rules for Undergraduate Teams

IDEERS2017-V1

2017-05-25

9 of 21

4.7.3 The exterior clearance ratio of a floor is defined as:

$$\frac{\sum X_i}{\sum L_i} * 100\% \quad (1)$$

4.7.4 When the elevation of a floor in a certain direction is a trapezoid and the bottom side is wider than the top side (Figures 8a and 8b), L_i is the length of the bottom side. The corresponding X_i is the clear length of the bottom floor perimeter, which is not occupied by the downward projection of bracings and inclined columns.

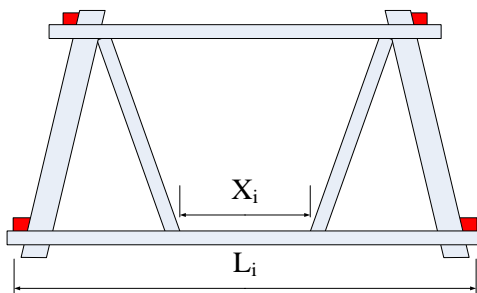


Figure 8a

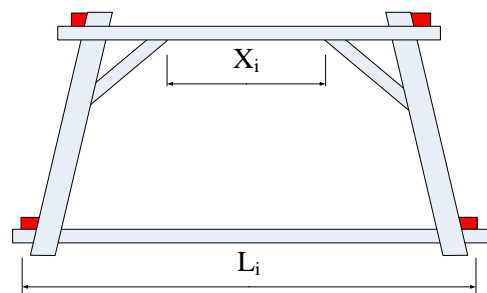


Figure 8b

4.7.5 The space occupied by any materials, e.g., wooden sticks, cotton string, paper, etc., cannot be included into X_i when computing the exterior/interior clearance.

4.7.6 The exterior clearance ratio of each floor ($\sum X_i / \sum L_i * 100\%$), except the 1st floor, must be larger than 45%.

4.7.7 The exterior clearance ratio ($\sum X_i / \sum L_i * 100\%$) of the first floor must be larger than 70%.

4.8 Interior clearance

4.8.1 In order to keep passages inside a floor, any vertical cross section of a floor must not be fully blockaded. A fully blockaded vertical cross section is the width of the vertical cross section all occupied by the projection of materials/members. The width of the passage is the so-called interior clearance.




Figure 9





Figure 10



2017 IDEERS Rules for Undergraduate Teams

IDEERS2017-V1

2017-05-25

10 of 21

4.8.2 The passage should be kept in all directions. That is to say, the vertical cross sections in all directions are not fully blockaded. For example, the projection of Figure 9 is shown as Figure 10. The dashed lines shown in Figure 10 are the passages.

4.8.3 When the distance between the end of a vertical member/material and the floor edge is less than 2.5 cm, this member/material is considered as an exterior bracing (Figure 11). An exterior bracing affects only the computation of the exterior clearance rather than the interior clearance.

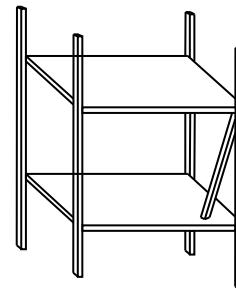



Figure 11. An exterior bracing.

4.8.4 The interior clearance in any direction must be not less than 5 cm (Figs. 9 and 10).


4.8.5 It should be noted that the interior bracings cannot touch with the mass blocks. The detail explanation of this item is stated in section 5.

4.8.6 The interior clearance of the 1st floor must be kept maximum. In other words, it is not allowed to install any interior braces or walls inside the 1st floor.

5. The placement of mass blocks

In reality, buildings are subjected to various types of loading. In this competition, mass blocks are used to simulate the vertical loading occurred in real buildings. The rules of placing the mass blocks are:

5.1 The material of the mass blocks is steel. The dimension of each mass block is 6.0 cm × 4.5 cm × 3.0 cm (±2 mm). The weight of each mass block is about 635 g. The average vertical loading on each unit floor area is 10 to 12 g/cm² (denoted as w_r) for all floors except the RFL and 1FL. The value of w_r can be different for every floor. For the RFL, the average vertical loading on each unit floor area is 14 to 16 g/cm² (denoted as w_t). There is no need

	2017 IDEERS Rules for Undergraduate Teams	IDEERS2017-V1
		2017-05-25
		11 of 21

of mass blocks on 1FL. The required number of mass blocks on each floor is computed by using Equation (2). Then the computed value should be rounded off to the integer place.

For all floors except the RFL and 1FL, the number of mass blocks
= floor area (cm²) × wr / 635, where wr = 10 ~ 12. (2a)

For the RFL, the number of mass blocks
= floor area (cm²) × wt / 635, where wt = 14 ~ 16. (2b)

5.2 All models should be loaded with at least the number of mass blocks computed from Rule 5.1. All of the mass blocks must be in compliance with Rules 5.3 to 5.6. Otherwise, the penalty weight is imposed on the model (Table 1). The number of mass blocks of each floor cannot be changed after the referee's approval in the model inspection.

5.3 Mass blocks may be placed horizontally or vertically on the floors. Nevertheless, mass blocks cannot not be stacked up.

5.4 Mass blocks cannot extrudes beyond the boundary of a floor ≥ 5 mm, and cannot touch columns or bracings. If the mass blocks touch columns or bracings, the mass blocks would be treated as a part of the structure. Therefore, the clear floor height of that floor will be computed starting from the highest contact point instead of the top edge of the highest beam.

5.5 Mass blocks are fixed to the floors while mounting the model to the shaking table. Only hot-melt glue can be used to fix mass blocks to the floors. Other materials, such as paper, cotton string, rubber bands etc., are not permitted to fix mass blocks.


5.6 If one mass block installed onto the model floors is found to have one or more of the following conditions, 50 grams of penalty weight would be imposed for that particular mass block. In addition, that mass block will not be counted into the calculation of Efficiency Ratio.

5.6.1 A mass block extrudes beyond the boundary of a floor ≥ 5 mm.

5.6.2 A mass block touches columns, or bracings.

5.6.3 Mass blocks are stacked up vertically.

5.6.4 The actual number of installed mass blocks does not conform to the approved number shown in the Calculation Sheet (caused by either mistakes or uncompleted installation).

	2017 IDEERS Rules for Undergraduate Teams	IDEERS2017-V1
		2017-05-25
		12 of 21

Example:

Floor no.	Floor area (cm ²)	Calculated number of mass blocks		Actual number of installed mass blocks	Weighting
		Lower bound (wt=14g, wr=10g)	Upper bound (wt=16g, wr=12g)		
RFL	200	4	5	5	3
6FL	200	3	4	4	3
5FL	250	4	5	5	2
4FL	250	4	5	5	2
3FL	320	5	6	6	1
2FL	350	6	7	6	1

6. The grading rules

The criterion used for grading the performance of the models is the efficiency ratio (ER). The ER is computed as:

$$ER(\text{EfficiencyRatio}) = \frac{I \times \sum W_i}{M_M - M_B + M_P} \quad (3)$$

where:

I : The maximum seismic intensity resisted by the model (gal).

$\sum W_i$: The total weighted number of mass blocks supported by the model. The number of mass blocks on different floors is multiplied by different weight factors (Figure 3). The weight factor for the mass blocks on the 2FL and 3FL is equal to one. The weight factor for the mass blocks on the 4FL and 5FL floors is two. The weight factor for the mass blocks on the 6FL and upper floors is three.

M_M : The mass of the model itself (including the base board, but excluding the mass blocks)

M_B : The mass of the base board.

M_P : The penalty mass, which penalizes the violation of the competing rules. The detail of the penalty mass is shown in Table 1.


	2017 IDEERS Rules for Undergraduate Teams	IDEERS2017-V1
		2017-05-25
		13 of 21

Table 1. The penalty mass.

Rule No.	Violations	Penalty mass
15.3	Clean up the working area and arrange the tools in order	500 g
4.2.1	The site area of the model and the clearance along the edge of the base board (≥ 3 cm)	500 g
4.2.2		
4.4.1	Except the 1FL, there are at least four floors can be loaded with mass blocks.	500 g
4.4.2	The height of the model ($45 \text{ cm} \leq H \leq 70 \text{ cm}$, total height ≤ 80 cm)	200 g
4.5.1	Except the 1FL, the total floor area ($1000 \text{ cm}^2 \leq A \leq 2000 \text{ cm}^2$)	100 g
4.8.6	The interior clearances for the 1FL	500 g
5.1	Violation of mass block installation requirements	50 g /block
5.6		
4.6.1	The clear floor height (1FL ≥ 15 cm, 10 cm \leq all other floors ≤ 12 cm)	50 g / cm
4.6.2		
4.7.6	Exterior clearance $\Sigma X_i / \Sigma L_i$ (1FL > 70%, OTHER FLRS > 45%)	10 g / %
4.7.7		
4.8.4	Interior clearance (must ≥ 5 cm for all floors)	100 g / cm
4.4.1	Floor area (2-3FL: $\geq 250 \text{ cm}^2$; 4FL-RFL $\geq 150 \text{ cm}^2$)	5 g / cm^2
4.5.2	Each floor area of the 4 th and the upper floors should be 60% to 80% of that of the 3FL.	10 g / %

Example:

There is a model with the mass of the model itself, M_M , equal to 750 g, and the mass of the base board, M_B , equal to 275 g. In addition, the penalty mass, M_P , is 50 g because the clear height of one floor is only 9.6 cm. There are 6, 6, 5, 5, 4, and 5 mass blocks placed on the 2FL, 3FL, 4FL, 5FL, 6FL, and RFL, respectively. This model passes the shaking test with a PGA equal to 700 gal (i.e., $I = 700$), but fails at the subsequent shaking test with a PGA equal to 800 gal. The efficiency ratio of this model is computed as:


$$ER = \frac{I \times \sum W_i}{M_M - M_B + M_P} = \frac{700 \times (6 \times 1 + 6 \times 1 + 5 \times 2 + 5 \times 2 + 4 \times 3 + 5 \times 3)}{750 - 275 + 50} = 78.67$$

7. Mounting models onto the shaking table

Before the models are tested on the shaking table, there are periods allowing all teams to mount their models onto the shaking table and fix mass blocks on the floors of models.

7.1 Only two members of each team are allowed to mount their model onto the shaking table and fix the mass blocks. This task should be completed within 20 minutes. The team members are responsible for the completion of this task.

7.2 The organizer will provide each team with two screwdrivers and screws for mounting the model onto the shaking table.

	2017 IDEERS Rules for Undergraduate Teams	IDEERS2017-V1
		2017-05-25
		14 of 21

- 7.3 The organizer will provide each team with a hot-melt glue gun and hot-melt glue for fixing the mass blocks on the floors of the model.
- 7.4 The materials and tools not provided by the organizer cannot be used to mount the models onto the shaking table and fix the mass blocks.
- 7.5 During the period of mounting the models onto the shaking table and fixing the mass blocks, it is not allowed to strengthen the structure of the model.
- 7.6 The team members mounting the models onto the shaking table should be careful not to touch other teams' models, which have already been mounted on the table.
- 7.7 After all teams completed the task of mounting their models onto the shaking table and fixing the mass blocks, IDEERS staff will check whether or not the screws on the four corners of each model are secure. Nevertheless, each team is still completely responsible for the fixing of the model onto the shaking table (rule 7.1). The team should accept the judge that the model fails in the test, if the base board is apparently loosened during the test.
- 7.8 The judges will examine all models mounted on the shaking table. The model with the following conditions stated in 7.8.1 to 7.8.3 will be required to make modifications of the model within an allowed time period. Otherwise, a certain penalty will be given to the model by the judges. Sometimes, in the worst case, the team may be disqualified for ranking in this contest.
- 7.8.1 The number of mass blocks on each floor is not consistent with that reported in the check table.
- 7.8.2 Mass blocks are attached to columns/bracings by using hot-melt glue.
- 7.8.3 Mass blocks are beyond the boundary of the supporting floor ≥ 5 mm.

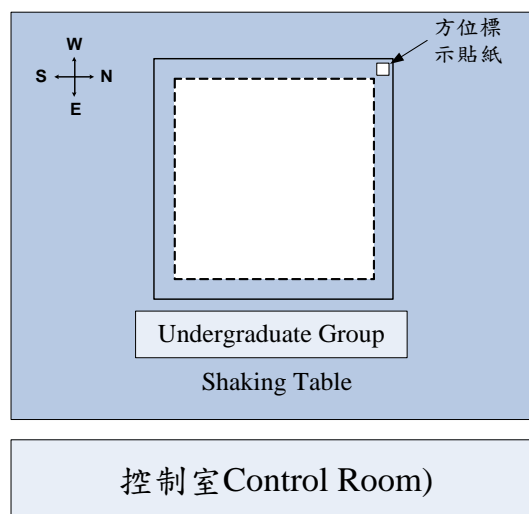



Figure 12. The orientation of the model fixed on the shaking table.

	2017 IDEERS Rules for Undergraduate Teams	IDEERS2017-V1
		2017-05-25
		15 of 21

- 7.9 The side of the base board marked with a sticker is where the model should be built on. In addition, when mounting the model onto the shaking table, the sticker should be on the northwest corner (shown as Figure 12). If there is any question about the relative positions or directions shown in Figure 12, please ask the staffs/judges for assistance.
- 7.10 The base board is fixed to the shaking table by using a metal plate (Figure 13), referred to as fixing plate. Please note the orientation of the metal plate because the layouts of the holes on the four sides of the metal plate are not the same.

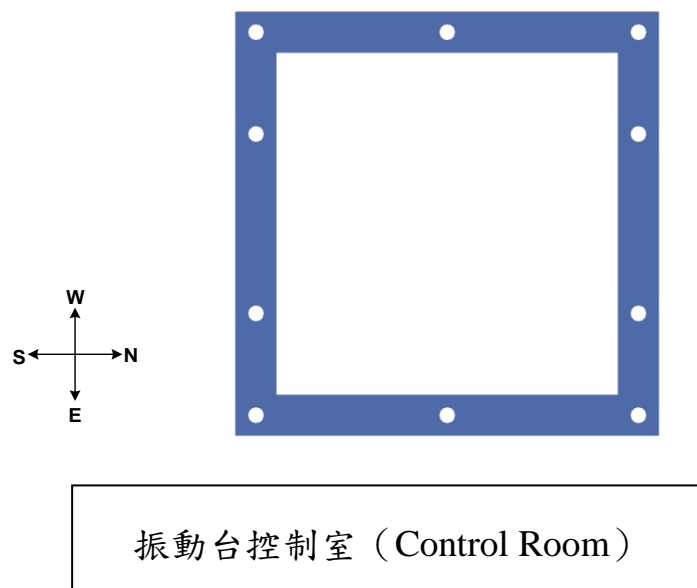



Figure 13. The metal plate for fixing the base board onto the shaking table

8. Loading protocols

All models will be tested simultaneously on the shaking table. The artificial earthquakes generated by the shaking table contain a broadband of sweeping excitation frequencies. The intensity of each artificial earthquake is represented by using the peak ground acceleration (PGA). The PGA increases from one test to another. Figure 14 shows the two components of the displacement time histories of the artificial earthquake.

- 8.1 There will be at most six tests, in which the PGAs are arranged in the sequence of 250 gal, 400 gal, 500 gal, 600 gal, 700 gal, 800 gal.
- 8.2 The teams whose models pass the test with the PGA equal to 400 gal, which is equivalent to an earthquake with the intensity VI in Taiwan, will receive the Quake-Resistant Certificate.
- 8.3 Only the models passing the test with the PGA equal to 600 gal are qualified for ranking in this contest. In addition, the models qualified for ranking the three first should pass the 700 gal test.

	2017 IDEERS Rules for Undergraduate Teams	IDEERS2017-V1
		2017-05-25
		16 of 21

8.4 The bidirectional time histories of the artificial earthquakes are available on the IDEER's website. All teams are encouraged to download these data.

8.5 The mentioned directions are according to those specified in the lab. Figure 12 shows the directions and the orientation for mounting the models to the shaking table.

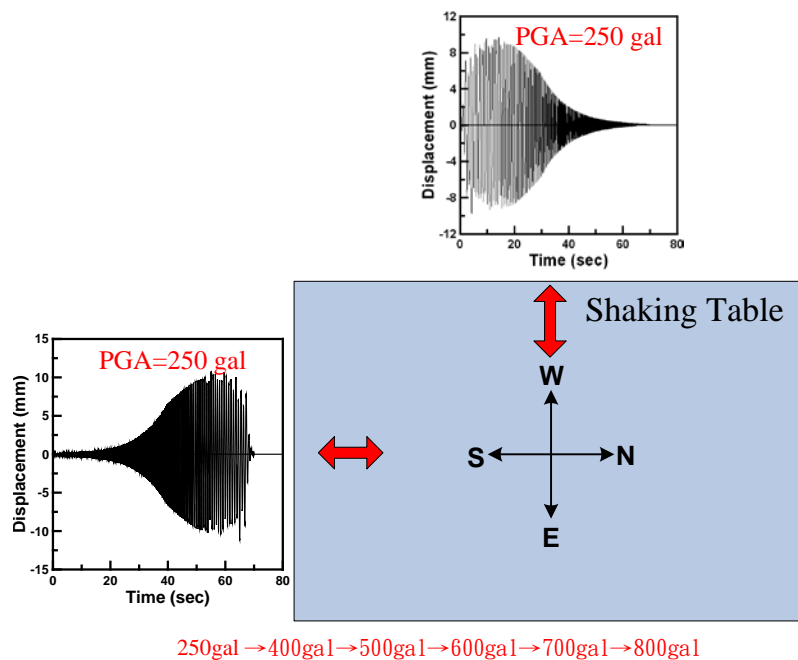


Figure 14. The E-W and N-S components of displacement time histories of the artificial earthquake.

9. The failure criteria


A model will be judged to fail the test when the following conditions occur. The failed model will be removed from the shaking table before next test.

9.1 Any floor is unstable or collapsed.

9.2 Any mass block falls off, significantly dislocates, sways, or rocks.

9.3 The number of columns detached from the base board is larger than or equal to one half of the total number of columns.

9.4 The residual displacement of the inclined model, which is the horizontal distance measured from the original roof position to the final roof position, is greater than or equal to 10 cm.

	2017 IDEERS Rules for Undergraduate Teams	IDEERS2017-V1
		2017-05-25
		17 of 21

9.5 The base board is apparently loosened during the test.

9.6 The jury has the consensus that a model fails in the test.

10. The fixing plate

A fixing plate (Figure 13), which is used to fix the base board to the shaking table, is provided by the organizer. In order to make sure that the models are built within the allowable site area, all teams are suggested to put this plate through the models at times during the process of constructing the models. The judges will use this fixing plate to check whether or not the building is constructed within the allowable site area.

11. The Exhibition Object

Each team must prepare an exhibition object displaying the design concept and creativity of the model. This exhibition object is done before this two-day competition. The object could be either two-dimensional or three-dimensional. The way of exhibition could be in a static and/or dynamic style. The space for this exhibition is limited to 35 cm (height) \times 25 cm (width) \times 25 cm (depth) shown as Figure 15. The Design-Concept Exhibition Award is granted based on the clarity and creativity of displaying the design concept of the model. The affiliation of the team including the department and the university/college should be presented in the exhibition object. If the exhibition object uses electronic products, the team is responsible for the safe keeping of the electronic products. In addition, the team is responsible for the power supply to the electronic products.

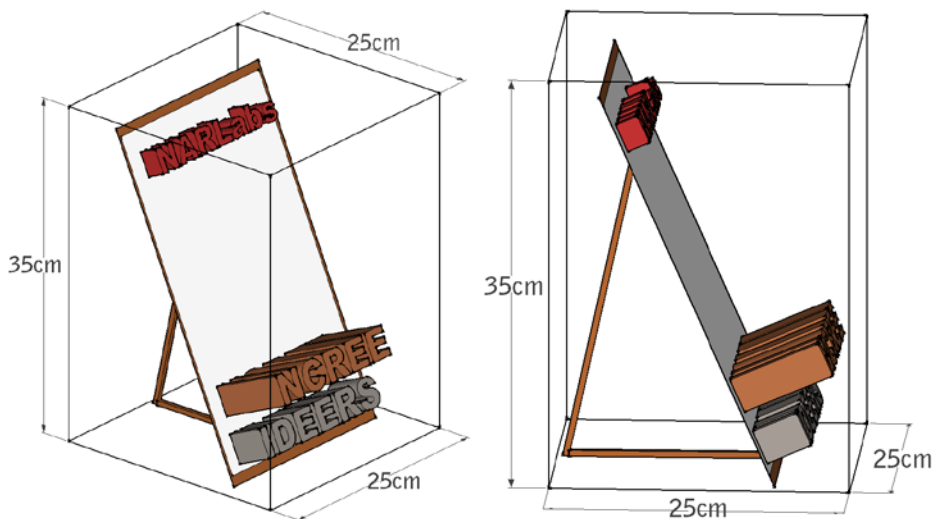



Figure 15. The allowable exhibition space

	2017 IDEERS Rules	IDEERS2017-V1
	for Undergraduate Teams	2017-05-25
		18 of 21

12. The team flag

Each team must design a team flag, which is installed on the model during the first day of this contest. This flag may be drawn before or during this contest. All possible shapes of this flag are allowed. Nevertheless, the size of this flag should be no larger than that of a sheet of A6-size paper (14.4 cm L × 10.5 cm W, i.e., a quarter of an A4-size paper). This flag can be installed on the model by using any provided materials, such as the bamboo sticks.

13. Model inspection

The period of the model inspection begins at the end of the model construction and ends at the start of the shaking table tests.

13.1 The procedures of the model inspection are:

(1) The host calls the team number. (2) The team members weigh the model. (3) The judges inspect the model and then fill in the inspection form. (4) The staffs take a picture of the model and the exhibition object. (5) The team members place the model and the exhibition object on the designated table for displaying. On the second day, all competitors and judges vote models and exhibition objects for some special prizes. (6) Two team members mount the model onto the shaking table for the tests.

13.2 The items submitted to the judges for inspection are:


(1) the model, (2) the model inspection form, (3) the calculation sheet of the floor area, (4) the check frame and (5) the exhibition object.

All of the abovementioned items are taken to the judges by two members of each team.

13.3 During the model inspection period, judges have the right to request the model to be modified or to make penalties to the model if the model violates the contest rules. During the two-day contest, jury has the right to re-inspect any models. The team, whose model needs to be re-inspected by the jury, cannot reject this request.

14. Architectural Aesthetic Awards, Structural Design Awards, and Design-Concept Exhibition Awards

14.1 Aesthetic Architecture Awards are granted on the basis of the architectural features, the efficiency of using the site area, and the plan of inner space. The jury chooses at most three models for these awards. The team winning this award will be granted NT\$5000 and a certificate for each team member. The evaluated items and the corresponding weights for these awards are:

	2017 IDEERS Rules	IDEERS2017-V1
	for Undergraduate Teams	2017-05-25
		19 of 21

item	weight	contents
architectural features	70%	<ul style="list-style-type: none"> ● Aesthetic of architecture ● Architectural feature and creativity
the efficiency of using the site area and the plan of inner space	30%	<ul style="list-style-type: none"> ● The rationality and comfort of inner space ● The rationality of using the site area

14.2 Structural Design Awards are granted on the basis of the structural design of models, the concept and creativity of seismic resistance. The jury chooses at most three models for these awards. The team winning this award will be granted NT\$5000 and a certificate for each team member. The evaluated items and the corresponding weights for these awards are:

item	weight	contents
Structural design	70%	<ul style="list-style-type: none"> ● The arrangement of structural members ● The rationality of loading path
the concept and creativity of seismic resistance	30%	<ul style="list-style-type: none"> ● The rationality of the concept of seismic resistance ● The creativity of the concept of seismic resistance

14.3 Design-Concept Exhibition Awards are granted on the basis of the clarity and creativity of displaying the design concept of the model. The jury chooses at most three models for these awards. The team winning this award will be granted NT\$3000 and a certificate for each team member. The evaluated items and the corresponding weights for these awards are:

item	weight	contents
Introduction of the design concept	60%	The clarity of introducing the design concept
The way of showing the design concept	40%	<ul style="list-style-type: none"> ● The vividness of the way showing the design concept ● The creativity of the way showing the design concept

15. Special notices

15.1 In comparison with the contest rules adopted in previous years, there are significant modifications in this year's contest rules. All participants should read all contest rules in detail. The main modifications of this year's contest rules are:


- 15.1.1 An A3-size cutting mat is provided for the use while cutting. In addition, two screwdrivers are provided for enhancing the efficiency of fixing the model onto the shaking table.
- 15.1.2 The total height of the model including the flag and decorations should be not larger than 80 cm.
- 15.1.3 The models qualified for ranking the three first should pass the 700 gal test.
- 15.1.4 A fixing plate instead of a check frame is provided. In order to make sure that the models are built within the allowable site area, all teams are suggested to put this plate through the models at times during the process of constructing the models.
- 15.2 In order to save the inspection time, each team should complete the model inspection form, the calculation sheets of the floor area and the number of mass blocks before submitting the model to the judges for inspection.
- 15.3 Each team must clean their working area and arrange the tools in order after completing their models. Otherwise, the team will be punished by adding a penalty weight equal to 500 g.
- 15.4 In order to check the number of mass blocks, the relationships between the floor area and the number of mass blocks are listed in the below two tables. Each of the floor areas of the 2nd and 3rd floors should not be less than 250 cm².

(a) The RFL

Number of mass block	Lower limit	< floor area <	Upper limit
3	150	< floor area <	158.75
4	150	< floor area <	204.11
5	178.59	< floor area <	249.46
6	218.28	< floor area <	294.82
7	257.97	< floor area <	320
8	297.66	< floor area <	320

(b) All floors except the RFL

Number of mass block	Lower limit	< floor area <	Upper limit
3	150	< floor area <	222.25
4	185.21	< floor area <	285.75
5	238.13	< floor area <	349.25
6	291.04	< floor area <	400
7	343.96	< floor area <	400
8	396.88	< floor area <	400



2017 IDEERS- Undergraduate Teams


IDEERS2017

Floor Area Calculation Form

2017-05-25

1 of 2

Floor No.	Floor Area (cm ²)	Floor Dimension Drawing & Floor Area Calculation
__FL		
__FL		
__FL		
__FL		



2017 IDEERS- Undergraduate Teams

IDEERS2017

Floor Area Calculation Form

2017-05-25

2 of 2

__FL		
__FL		
__FL		
__FL		
總面積 Total		

Check Table of 2017 IDEERS Undergraduate Teams

Team No.	School Name				
M_M (Mass of the Model)				gg	Reviewer
M_B (Mass of the Base Board)				gg	
M_P (Weight Penalty)				gg	
$M_M - M_B + M_P =$				gg	
1. Field cleanup & tools collation <input type="checkbox"/> O.K. <input type="checkbox"/> N.G.		Penalty (500g)			
2. Building range & board boundary clear width (≥ 3 cm)		Penalty (500g)			
		cm			
3. Except the 1FL, there are at least four floors can be loaded with mass blocks. <input type="checkbox"/> O.K. <input type="checkbox"/> N.G.		Penalty (500g)			
4. Height (model: $45\text{cm} \leq H \leq 70\text{cm}$, total height $\leq 80\text{cm}$)		Penalty (200g)			
		cm			
5. Except the 1FL, total floor area ($1000\text{cm}^2 \leq A \leq 2000\text{cm}^2$)		Penalty (100g)			
		cm²			
6. Interior clearance of 1FL <input type="checkbox"/> O.K. <input type="checkbox"/> N.G.		Penalty (500g)			
7. Violation of mass block installation requirements		Penalty (50g / per Steel Block)			
		blocks			
8. Seback of floor areas (the floor area of 4FL and upper floors is 60~80% of that of 3FL)		Penalty (10g / %)			
9. Clear height (1FL $\geq 15\text{cm}$; 10cm \leq OTHER FLRS $\leq 12\text{cm}$)		Penalty (50g/cm)			
__FL		cm		gg	
__FL		cm		gg	
5FL		cm		gg	
4FL		cm		gg	
3FL		cm		gg	
2FL		cm		gg	
1FL		cm		gg	
10. Exterior clearance $\Sigma X_i / \Sigma L_i$ (1FL $> 70\%$, OTHER FLRS $> 45\%$)		Penalty (10g / 1%)			
	ΣL_i	ΣX_i	$\Sigma X_i / \Sigma L_i$		
__FL			%	gg	
__FL			%	gg	
5FL			%	gg	
4FL			%	gg	
3FL			%	gg	
2FL			%	gg	
1FL			%	gg	
11. Interior clearance ($\geq 5\text{cm}$)		Penalty (100g/cm)			
__FL		cm		gg	
__FL		cm		gg	
5FL		cm		gg	
4FL		cm		gg	
3FL		cm		gg	
2FL		cm		gg	
1FL		cm		gg	
12. Floor area (each floor)		Penalty (5g/cm ²)			
__FL		cm ²	$\geq 150\text{cm}^2$	gg	
__FL		cm ²	$\geq 150\text{cm}^2$	gg	
5FL		cm ²	$\geq 150\text{cm}^2$	gg	
4FL		cm ²	$\geq 150\text{cm}^2$	gg	
3FL		cm ²	$\geq 250\text{cm}^2$	gg	
2FL		cm ²	$\geq 250\text{cm}^2$	gg	
Total		cm ²			
13. Number of steel blocks of each floor		Weighting	Wi		
__FL		x 3 =			
__FL		x 3 =			
5FL		x 2 =			
4FL		x 2 =			
3FL		x 1 =			
2FL		x 1 =			
Total		$\Sigma W_i =$			

Unit: Area: cm² Length & Height: cm Mass: gram